


## Bounto P2

### Description

Bounto P2 is designed for pendant installation. It is equipped with 2x280lm SMD LEDs, delivering a total luminous flux while consuming 18W of power. With a dim - to - warm function, the color temperature is adjustable from 1800K to 3000K, generating a warm lighting ambiance. Crafted from iron and glass, it boasts an elegant design. It also comes with a Triac (TED) driver included, has a CRI of 90, an efficacy of 31lm/w, and operates at a frequency of 50/60Hz. Protection class: I, Protection rating: IP20. Voltage: 220-240V AC, lifespan: 50.000 hours. Article number: V107002T1B.

Size	800x75x1860 mm
Lumen	2x280lm
LED Type	SMD
Wattage	18W
Dim to warm	1800-3000K
Protective class	1
LED Chip lifetime	50.000h
Material	Iron, Glass
Driver	Triac (TED) included
SDCM	<6
CRI	90
Efficacy (lm/w)	31
IP Rating	IP20
Voltage	220-240V
Frequency	50/60Hz
Installation	Pendant
Weight(kg)	2.90

### Technical drawing


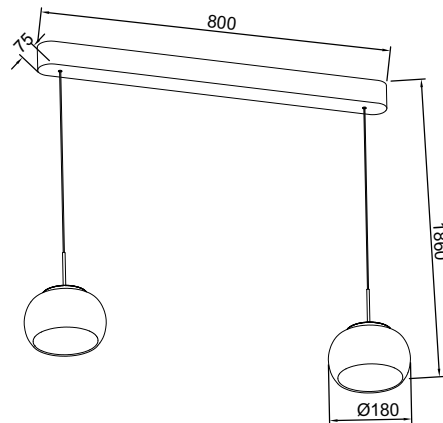


**Color**      **Art.No**



V107002T1B

Adjustable  
drop  
length

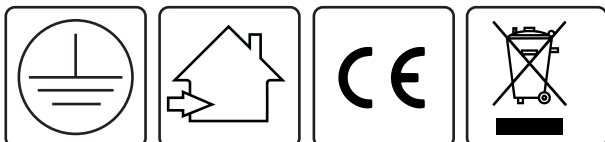

**Disclaimer**  
All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.  
As of: 20/10/2025. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>