




## Bounto P3, amber

Size	800x80x1960 mm
Lumen	3x450lm
LED Type	SMD
Wattage	24W
Dim to warm	1800-3000K
Protective class	1
LED Chip lifetime	50.000h
Material	Iron, Glass
Driver	Triac (TED) included
SDCM	<5
CRI	90
Efficacy (lm/w)	56
IP Rating	IP20
Voltage	220-240V
Frequency	50/60Hz
Installation	Pendant
Weight(kg)	3.90

### Description

Bounto P3, with amber lampshades, is designed for pendant installation. It measures 800x80x1960 mm. Equipped with SMD LEDs, it delivers a total luminous flux of 1350lm while consuming 24W of power. With a dim - to - warm function, the color temperature is adjustable from 1800K to 3000K, generating a warm lighting ambiance. Crafted from iron and glass, it boasts an elegant design. It also comes with a Triac (TED) driver included, has an SDCM of <5, a CRI of 90, an efficacy of 56lm/W, and operates at a frequency of 50/60Hz. Protection class: I, Protection rating: IP20. Voltage: 220-240V AC, lifespan: 50.000 hours. Article number: V107051T1B.

### Technical drawing

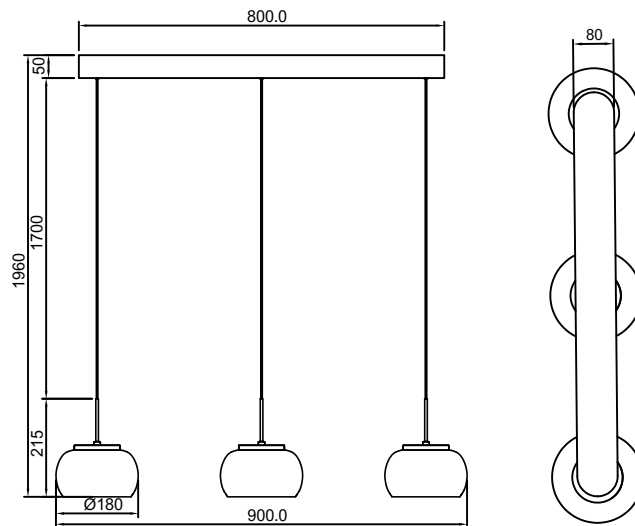



Color

Art.No



V107051T1B

Adjustable  
drop  
length

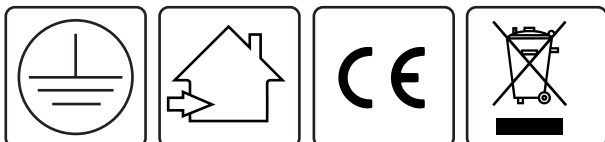

**Disclaimer**  
All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.  
As of: 20/10/2025. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>