




LED Emergency Exit Sign Wall or Ceiling Mounted 230V, 2W, selftest

Size	289x35x219mm
Lumen	15lm
LED Type	SMD
Maintained Power	2W
Emergency Power	1W
CCT	5700K
Protective class	2
LED Chip lifetime	50.000h
Material	Polycarbonate, Acrylic
Driver	on/off included
CRI	80
Efficiency (lm/w)	15
IP Rating	20
Voltage	220-240V
Frequency	50/60 Hz
Installation	Wall/Ceiling
Battery	LiFePO4, 3.2V, 1800mAh
Rated duration of operation	3h
Viewing distance	24m
Working temperature	0°C to 40°C
Weight (kg)	0.62
IK	06

Color **Art.No**


○ V401006

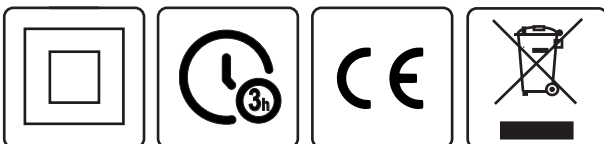



Description

The LED Emergency Exit Sign is a wall or ceiling-mountable lighting fixture engineered for reliable emergency guidance. It features a 2W power output and an integrated self-test function. With dimensions of 289x35x219mm, it employs SMD LED technology to deliver a luminous flux of 15lm. Boasting a correlated color temperature (CCT) of 5700K, its LED chip ensures consistent and dependable performance. Constructed from polycarbonate and acrylic, it achieves a Color Rendering Index (CRI) of 80 for accurate color rendition. The fixture operates at a frequency of 50/60 Hz, functions within a temperature range of 0°C to 40°C, and has an IK rating of 06 for impact resistance. It has a viewing distance of 24m, a rated emergency operation duration of 3h, and is equipped with a LiFePO4 battery of 3.2V and 1800mAh. Protection class: II. Protection rating: IP20. Voltage: 220-240V AC. Lifespan: 50.000 hours. Article number: V401006.

Technical drawing

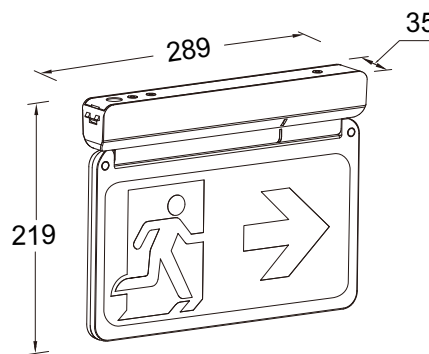

Operation mode

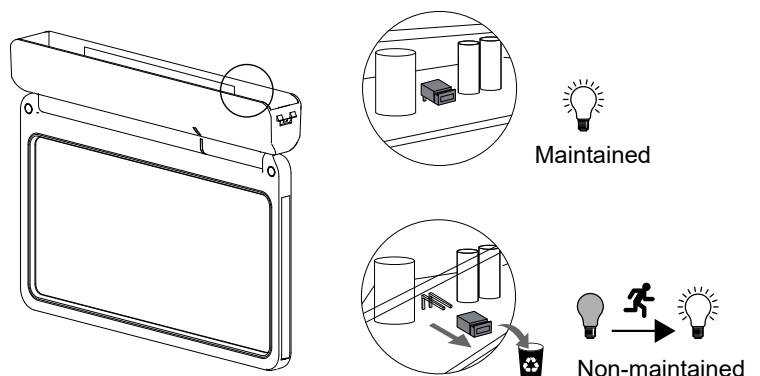

Pictograms (6 pcs. included)

Disclaimer
All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.
As of: 22/11/2025. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>