




## LED Emergency bulkhead 230V IP65 3W, 150lm, selftest

Size	352x110x60mm
Lumen	150lm
LED Type	SMD
Wattage	3W
CCT	5700K
Protective class	2
LED Chip lifetime	50.000h
Material	Polycarbonate
Driver	on/off included
SDCM	<6
CRI	80
Efficiency (lm/w)	50
IP Rating	65
Voltage	220-240V
Frequency	50/60Hz
Installation	Wall/Ceiling
Battery	LiFePO4, 3.2V, 1800mAh
Rated duration of operation	3h
Viewing distance	18m
Working temperature	0°C to 40°C
Beam angle	120°
Weight (kg)	0.48
IK	07

Color	Art.No
○	V401001

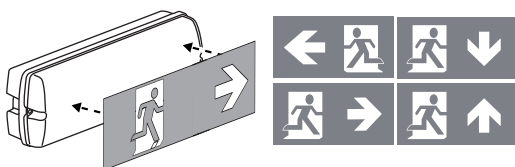


Pictograms (4 pcs. included)


### Description

The LED Emergency bulkhead is a lighting fixture with an integrated self-test function, measuring 352x110x60mm. It utilizes SMD LED technology, with a wattage of 3W and a lumen output of 150lm. With a CCT of 5700K, its LED chip guarantees reliable performance. Made from polycarbonate, it features SDCM < 6, a CRI of 80, and an efficiency of 50lm/W. It operates at 50/60 Hz, and is suitable for wall or ceiling installation. It works within a temperature range of 0°C to 40°C and has an IK rating of 07. It has a viewing distance of 18m, a rated emergency operation duration of 3h, and is equipped with a LiFePO4 battery of 3.2V and 1800mAh. Protection class: II. Protection rating: IP65. Voltage: 220-240V AC. Beam angle: 120°. Lifespan: 50.000 hours. Article number: V401001.


### Technical drawing

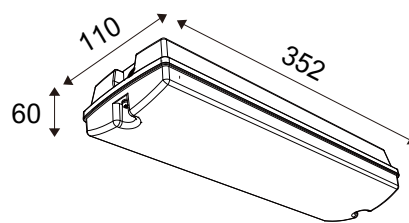

### Light Distribution

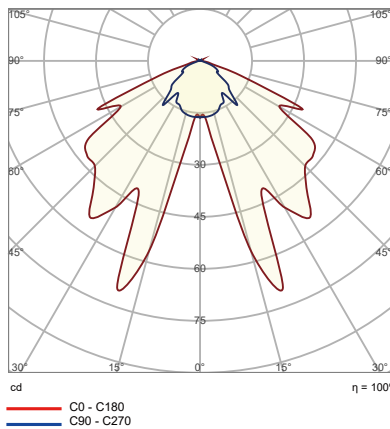

### Operation mode

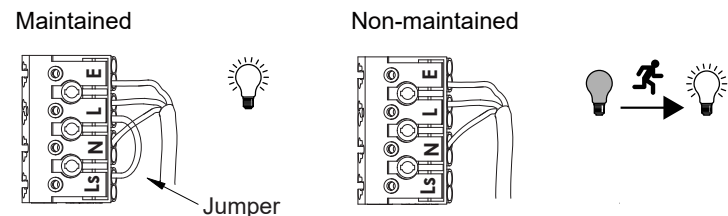

**Disclaimer**  
All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.  
As of: 22/11/2025. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>