

Description

Obox Wall Square Down is applicable for wall installation. In addition to its black aluminium housing, it is equipped with COB LED, a glass cover and a reflector, that ensures a 45° beam angle. With its IP65 protection rating, this fixture is suitable for outdoor use. Thanks to the integrated LED driver, Obox is ready for direct connection to a 230V power supply. The 2700K creates a warm white single up or down beam facades of house fronts, balconies, terraces, entrance areas, front doors, garages, hallways and staircases ensuring long-term use.

Obox is seaside proofed to ensure long-term outdoor use near coasts and perfectly combinable all fixtures of the Obox family.

Protection class: I, Protection rating: IP65.


Voltage: 220-240V AC, Beam angle: 45°, lifespan: 30.000 hours.

Article number: V201201A2B.


Obox Wall Square Down

Size	132x100x138mm
Lumen	845lm
LED Type	COB
Wattage	13W
CCT	2700K
Protective class	1
LED Chip lifetime	30.000h
Material	Glass, Aluminum
Driver	on/off included
SDCM	<6
CRI	80
Efficacy (lm/w)	65
IP Rating	IP65
Voltage	220-240V
Frequency	50/60Hz
Installation	Wall
Beam angle	45°
Weight(kg)	0.95

Technical drawing

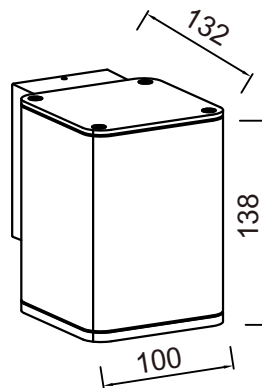

Light Distribution

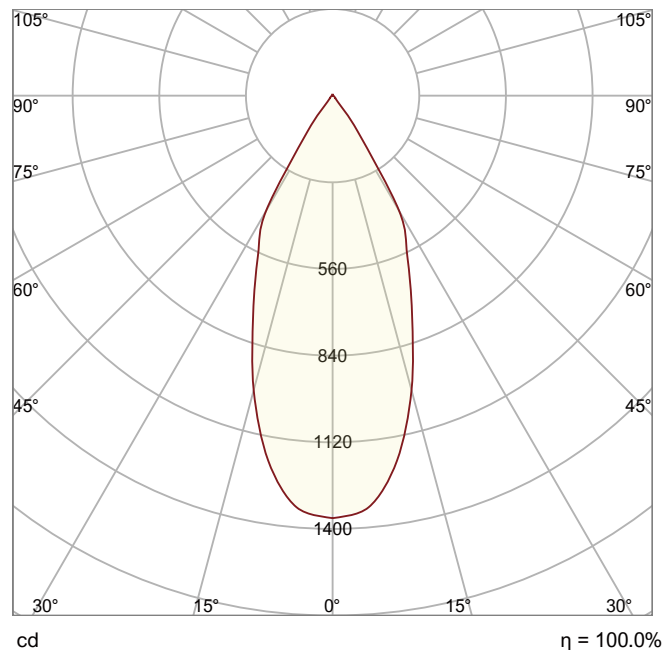

cd
— C0 - C180
— C90 - C270



$\eta = 100.0\%$

Color

Art.No



V201201A2B



Disclaimer
 All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.
 As of: 28/04/2025. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>