



Salsa Lid

Size	250 mm x 74 mm
Lumen	1100lm
LED Type	SMD
Wattage	12W
CCT switch	2700/3000/4000K
Protective class	1
LED Chip lifetime	50.000h
Material	Polycarbonate, Aluminum
Driver	on/off included
SDCM	<6
CRI	80
Efficacy (lm/w)	92
IP Rating	IP65
IK	08
Voltage	220-240V
Frequency	50/60Hz
Installation	Wall
Beam angle	110°
Weight(kg)	1.10

Color

Art.No



V203300A7B

Description

Salsa Lid, the round LED surface-mounted luminaire for walls, loop in loop out installation, IP65, 250 x 74mm, IK08, with rotationally symmetric deep-wide beam light distribution.

Cover and body made of aluminium in black, opal polycarbonate cover, rated luminous flux 1100 lm, rated power 12W, with CCT switch 2700/3000/4000K to adjust the light color to the situational needs, general color rendering index CRI >80. The half aluminium cover provides glare protection upwards.


Salsa is usable for multiple indoor and outdoor usecases and installations like walls of hallways, staircases, bathrooms, basement and storage rooms, garages, bathrooms, balconies and terraces of private houses, rental flats, restaurants, public buildings or offices.

Protection class: I, Protection rating: IP65.


Voltage: 220-240V AC, Beam angle: 110°, lifespan: 50.000 hours.

Article number: V203300A7B.

Technical drawing

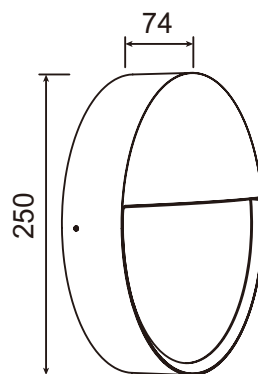


Light Distribution

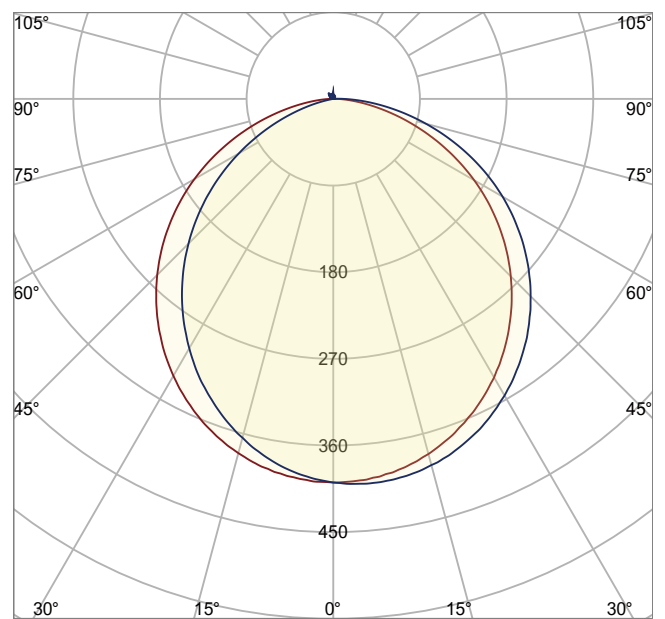

cd

$\eta = 100.0\%$

— C0 - C180
— C90 - C270

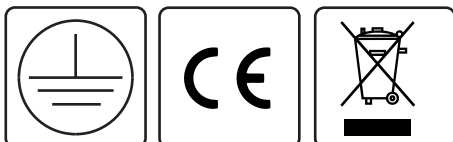

Disclaimer
All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.
As of: 28/04/2025. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>