



Sky Rail P1

| | |
|-------------------|----------------------|
| Size | 40 mm x 203 mm |
| Lumen | 300lm |
| LED Type | COB |
| Wattage | 5W |
| CCT | 2700K or 3000K |
| Protective class | 3 |
| LED Chip lifetime | 50.000h |
| Material | Aluminum, Iron |
| SDCM | <6 |
| CRI | 90 |
| Efficacy (lm/w) | 60 |
| IP Rating | IP20 |
| Voltage | 48VDC |
| Installation | Sky rail rope system |
| Beam angle | 24° |
| Weight(kg) | 0.33 |

| 2700K | Art.No | Color |
|-------|------------|-------|
| | V120003A2B | ● |
| 3000K | Art.No | Color |
| | V120003A3B | ● |

Description


The Sky Rail P1, with two color temperature options—2700K (softer, warm light for cozy track ambiance) and 3000K (warm, vibrant glow for modern track setups).

Protection class: III, Protection rating: IP20.


Voltage: 48VDC, Beam angle: 24°, lifespan: 50.000 hours.

Article number: V120003A2B, V120003A3B.


Technical drawing

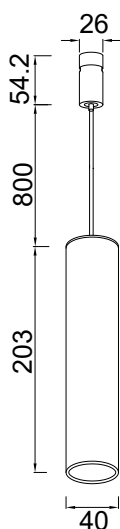

Light Distribution

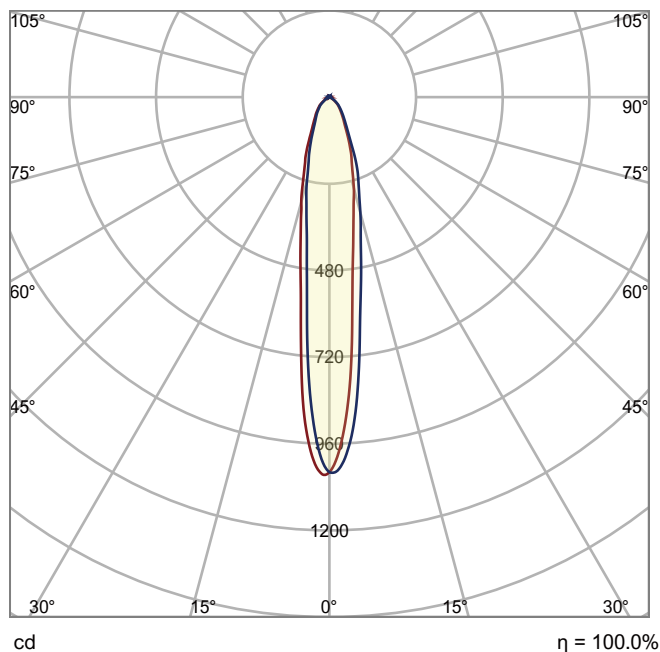

cd
— C0 - C180
— C90 - C270

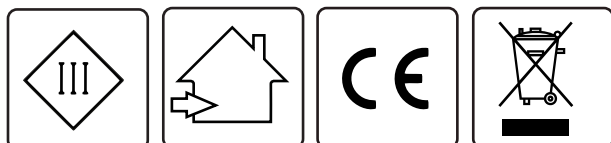

Disclaimer
All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.

As of: 20/08/2025. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>