



Sky Rail Spot

Size	167.5x67x93mm
Lumen	650lm
LED Type	COB
Wattage	10W
CCT	2700K or 3000K
Protective class	3
LED Chip lifetime	50.000h
Material	Aluminum, PA66
SDCM	<6
CRI	90
Efficacy (lm/w)	65
IP Rating	IP20
Voltage	48VDC
Installation	Sky rail rope system
Beam angle	24°
Weight(kg)	0.40

2700K	Art.No	Color
	V120001A2B	●
3000K	Art.No	Color
	V120001A3B	●

Description


The Sky Rail Spot, available in 2700K (warm, focused lighting for inviting, comfortable spaces) and 3000K (vibrant, dynamic lighting to enhance track applications), offers two color temperature options.

Protection class: III, Protection rating: IP20.


Voltage: 48VDC, Beam angle: 24°, lifespan: 50.000 hours.

Article number: V120001A2B, V120001A3B.

Technical drawing

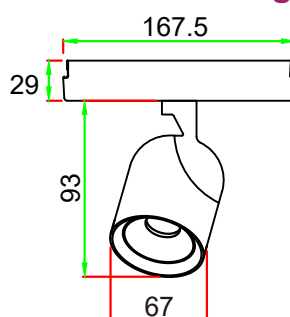


Light Distribution

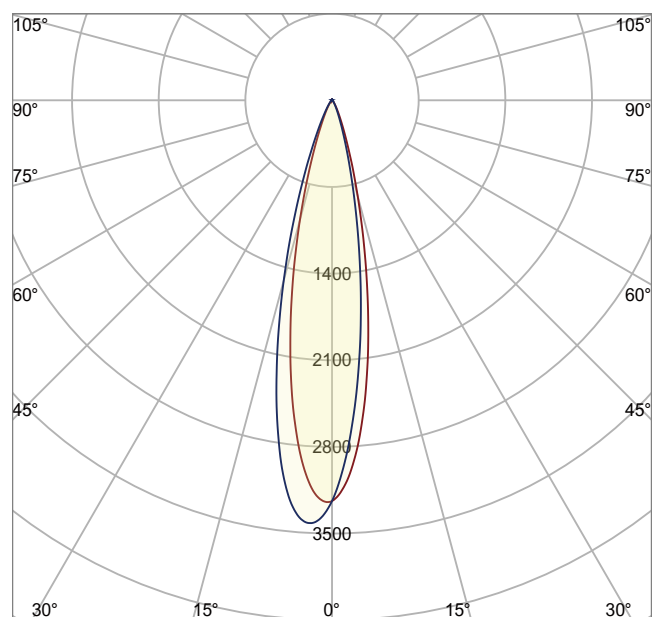

cd η = 100.0%

— C0 - C180
— C90 - C270

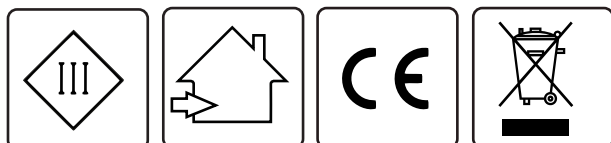

Disclaimer
All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.
As of: 20/08/2025. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>