


# Datasheet



## Description

The Sky Rail P2 excluding glass provides a customizable track light base, compatible with a variety of glass covers.  
 Protection class: III, Protection rating: IP20.  
 Voltage: 48VDC, Beam angle: 180°, lifespan: 50.000 hours.  
 Article number: V120004A2B.


## Technical drawing

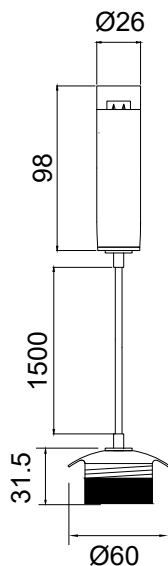

## Sky Rail P2, excl. glass



Size	60x31.5x1500mm
Lumen	270lm
LED Type	SMD
Wattage	5W
CCT	2700K
Protective class	3
LED Chip lifetime	50.000h
Material	Aluminum, Iron
SDCM	<6
CRI	90
Efficacy (lm/w)	54
IP Rating	IP20
Voltage	48VDC
Installation	Sky rail rope system
Beam angle	180°
Weight(kg)	0.15

## Light Distribution

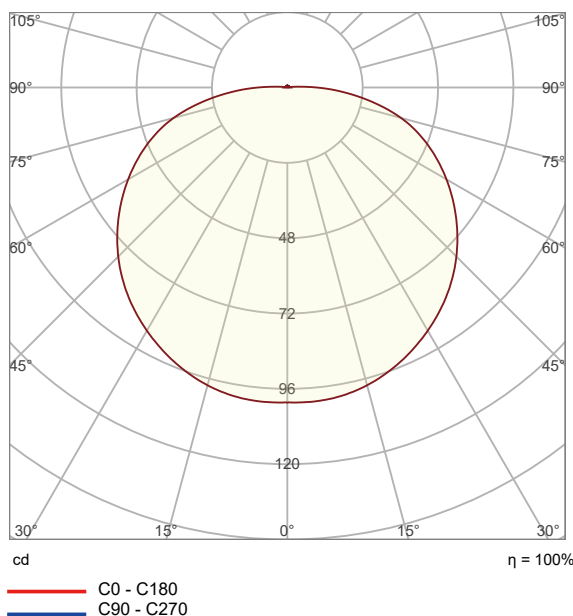

Color	Art.No
●	V120004A2B

Always use together with **Glass Cover**

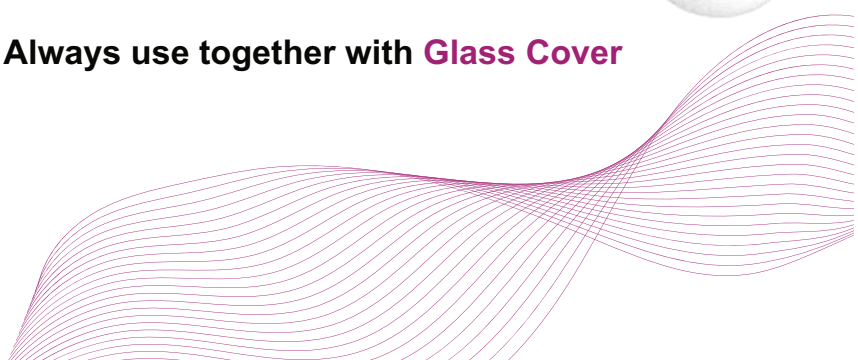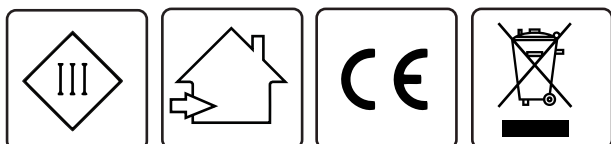

## Accessories



### Glass Cover

Size	Ø120mm
------	--------

Color	Art.No
-------	--------

Frosted	V121004N0B
---------	------------

Smoked	V121005N0B
--------	------------

See more details on [vysnlighting.com](https://www.vysnlighting.com)

#### Disclaimer

All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.

As of: 23/12/2025. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>