



Wollas S


Size	300x100x32 mm
Lumen	900lm
LED Type	SMD
Wattage	11.8W
CCT switch	2700/3000K
Protective class	1
LED Chip lifetime	50.000h
Material	Plastic, Aluminum
Driver	Triac (TED) included
SDCM	<6
CRI	90
Efficacy (lm/w)	76
IP Rating	IP20
Voltage	220-240V
Frequency	50/60Hz
Installation	Wall
Beam angle	285°
Weight(kg)	0.58

Color	Art.No
○	V101100T7W
●	V101100T7B



Description

Available in white and black, the Wollas S combines Triac dimmable LED technology with clean, efficient lighting in its white version and a minimalist design for focused illumination in its black counterpart. Voltage: 220-240V AC, Beam angle: 285°, lifespan: 50.000 hours. Article number: V101100T7W, V101100T7B.

Technical drawing

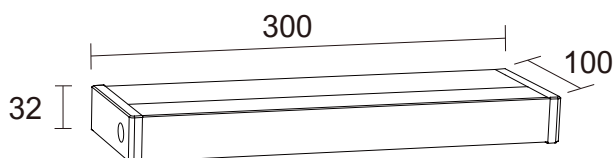

Light Distribution

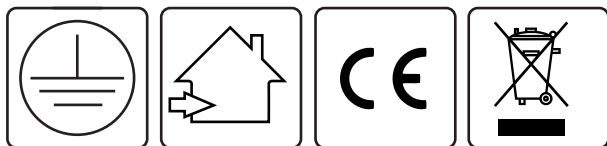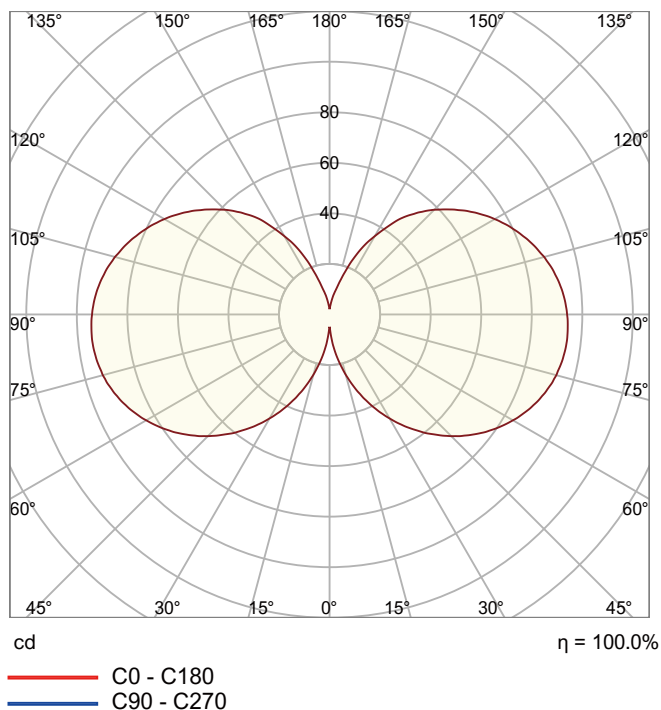

Disclaimer
All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.
As of: 28/04/2025. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>