

## Description


Velyth Floor 4000K is designed for floor installation. It is equipped with SMD LEDs, delivering 11800lm of luminous flux while consuming 120W of power. With a touch-dimmable function, the color temperature is fixed at 4000K, creating a bright and neutral lighting ambiance. Crafted from aluminum, it boasts a modern and minimalist design. It comes with a touch-dimmable switch, has a CRI of 97, an efficacy of 98lm/W, a UGR of <13 (glare-free for comfortable use), and operates at a frequency of 50/60Hz.

Protection class: II, Protection rating: IP20.


Voltage: 220-240V AC, Beam angle (Indirect/Direct): 110°/100°, lifespan: 50.000 hours.

Article number: V108120B4W.

## Technical drawing

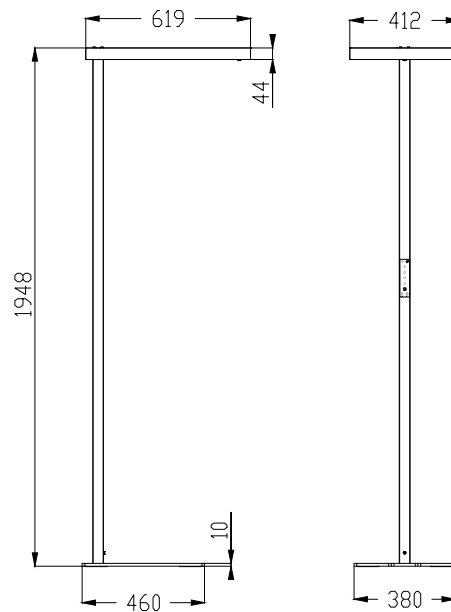

## Light Distribution

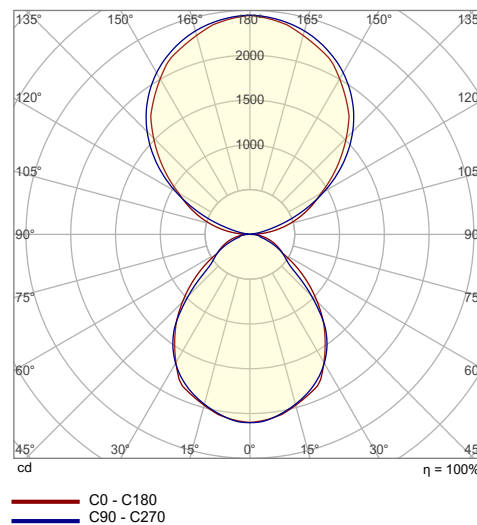

## Velyth Floor 4000K


Size	619x412x1948mm
Lumen	11800lm
LED Type	SMD
Wattage	120W
CCT	4000K
UGR	<13
Protective class	2
LED Chip lifetime	50.000h
Material	Aluminum
Driver	on/off included
Steering	Touch / Dim
SDCM	<5
CRI	97
Efficacy (lm/w)	98
IP Rating	IP20
Voltage	220-240V
Frequency	50/60Hz
Installation	Floor
Beam angle	110°/100°
Weight(kg)	17.3

Color

Art.No



V108120B4W

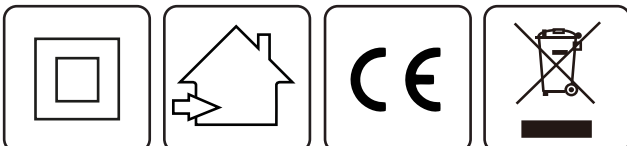

**Disclaimer**  
All technical data as well as weight and dimension specifications are based on standard values and have been carefully prepared. We reserve the right to make technical changes at any time to reflect progress. Product images are for illustrative purposes and may differ from the original. Errors excepted.  
As of: 26/03/2026. Orders are subject to our General Terms and Conditions of Sale, available at <https://www.vysnlighting.com/de/pages/agb>